



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

RECEIVED
APR 25 2002
TC 1700

Signed

Dated

4 April 2002

For official use

22 OCT 2001

NEWPORT

22OCT01 E66B905-1 002986
P01/7700 0.00-0125266.7

Your reference

268-56GB

0125266.7

Notes

Please type, or write in dark ink using CAPITAL letters. A prescribed fee is payable for a request for grant of a patent. For details, please contact the Patent Office (telephone 071-438 4700).

Rule 16 of the Patents Rules 1990 is the main rule governing the completion and filing of this form.

Do not give trading styles, for example, 'Trading as XYZ company', nationality or former names, for example, 'formerly (known as) ABC Ltd' as these are not required.

Warning

After an application for a Patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977 and will inform the applicant if such prohibition or restriction is necessary. Applicants resident in the United Kingdom are also reminded that under Section 23, applications may not be filed abroad without written permission unless an application has been filed not less than 6 weeks previously in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction revoked.

**The
Patent
Office**

**Request for grant of a
Patent**

Form 1/77

Patents Act 1977

1 Title of invention

22 OCT 2001

- 1 Please give the title of the invention WASTEWATER TREATMENT SYSTEM

2 Applicant's details

☒ **First or only applicant**

- 2a If you are applying as a corporate body please give:

Corporate name

Country (and State of incorporation, if appropriate)

- 2b If you are applying as an individual or one of a partnership please give in full:

Surname JOWETT

Forenames E. Craig

- 2c In all cases, please give the following details:

Address PO Box 385
177 Cobblestone Place
Rockwood, Ontario NOB 2K0
Canada

UK postcode (if applicable)

Country

ADP number (if known)

8090680001

15

2d, 2e and 2f: If there are further applicants please provide details on a separate sheet of paper.

☐ **Second applicant (if any)**

2d If you are applying as a corporate body please give:

Corporate name

Country (and State
of incorporation, if
appropriate)

2e If you are applying as an individual or one of a partnership please give in full:

Surname

Forenames

2f In all cases, please give the following details:

Address

UK postcode
(if applicable)

Country

ADP number
(if known)

① An address for service in the United Kingdom must be supplied

Please mark correct box

① Address for service details

3a Have you appointed an agent to deal with your application?

Yes ☒

No ☐ → go to 3b

↓
please give details below

Agent's name ASQUITH, Anthony

Agent's address 328 Leeds Road, Scholes
LEEDS LS15 4DD
ENGLAND

Postcode

Agent's ADP
number

656 220 1003

II

3b: If you have appointed an agent, all correspondence concerning your application will be sent to the agent's United Kingdom address.

3b If you have not appointed an agent please give a name and address in the United Kingdom to which all correspondence will be sent:

Name

Address

Postcode

ADP number
(if known)

Daytime telephone
number (if available)

Reference number

4 Agent's or
applicant's reference
number (if applicable) 268-56GB

⑥ Claiming an earlier application date

5 Are you claiming that this application be treated as having been filed on the date of filing of an earlier application?

Please mark correct box

Yes ☐ No ☒ **→ go to 6**

↓
please give details below

☐ number of earlier application or patent number

☐ filing date (day month year)

☐ and the Section of the Patents Act 1977 under which you are claiming:

Please mark correct box.

15(4) (Divisional) ☐ 8(3) ☐ 12(6) ☐ 37(4) ☐

④ If you are declaring priority from a PCT Application please enter 'PCT' as the country and enter the country code (for example, GB) as part of the application number.

Please give the date in all number format, for example, 31/05/90 for 31 May 1990.

⑥ Declaration of priority

6 If you are declaring priority from previous application(s), please give:

Country of filing	Priority application number (if known)	Filing date (day, month, year)

7 The answer must be 'No' if:

- any applicant is not an inventor
- there is an inventor who is not an applicant, or
- any applicant is a corporate body.

8 Please supply duplicates of claim(s), abstract, description and drawing(s).

Please mark correct box(es)

9 You or your appointed agent (see Rule 90 of the Patents Rules 1990) must sign this request.

Please sign here ➡

A completed fee sheet should preferably accompany the fee.

7 Inventorship

7 Are you (the applicant or applicants) the sole inventor or the joint inventors?

Please mark correct box

Yes ☒

No ☐

A Statement of Inventorship on Patents Form 7/77 will need to be filed (see Rule 15).

8 Checklist

8a Please fill in the number of sheets for each of the following types of document contained in this application.

Continuation sheets for this Patents Form 1/77

Claim(s)

3

Description

14

Abstract

1

Drawing(s)

3+3

8b Which of the following documents also accompanies the application?

Priority documents (please state how many)

Translation(s) of Priority documents (please state how many)

Patents Form 7/77 – Statement of Inventorship and Right to Grant
(please state how many)

Patents Form 9/77 – Preliminary Examination/Search

Patents Form 10/77 – Request for Substantive Examination

9 Request

I/We request the grant of a patent on the basis of this application.

Signed

Anthony Asquith

Date 18 October 2001
(day month year)

Please return the completed form, attachments and duplicates where requested, together with the prescribed fee to either:

☐ The Comptroller
The Patent Office
Cardiff Road
Newport
Gwent
NP9 1RH

or

☐ The Comptroller
The Patent Office
25 Southampton Buildings
London
WC2A 1AY

Title: WASTEWATER TREATMENT SYSTEM

[0001] This invention relates to the treatment of wastewater, being wastewater e.g from a domestic dwelling, and relates especially to the treatment of wastewater as has been traditionally carried out in a septic tank.

BACKGROUND TO THE INVENTION

[0002] Septic tanks have been well known for many years, and many designs have been proposed, ranging from the simple hollow rectangular box-shaped tank, to more intricate and sophisticated designs, in which separate compartments, baffles, and the like, have been used. These sophistications have been aimed at making sure the septic tank performs properly, in the sense that no water can emerge untreated from the tank, and at making sure the septic tank performs efficiently, in the sense that the septic tank performs its functions using a minimum of volume and space.

[0003] The traditional septic tanks have been made of concrete, metal, plastic, etc. The material has to be watertight, and must remain so for many years, and has to withstand the stresses arising from settling of the ground, from overloading and other abuses, and the like. Septic tanks have been designed with access hatches, whereby a person can inspect the interior and monitor the build-up of sludge and scum, and through which the sludge/scum can be extracted from time to time.

[0004] The invention is concerned with achieving the performance of a traditional septic tank, including promoting the anaerobic digestion reactions, separating sludge and scum from the water by settling, etc, but with achieving this performance in an apparatus that is of a more convenient and efficient configuration and size. One of the aims of the invention is to make it easier to find room for the apparatus, and to make less expensive the task of installing the apparatus, than has been the case with the traditional septic tank designs, and to allow easy installation in areas of high water table or high bedrock.

THE INVENTION IN RELATION TO THE PRIOR ART

[0005] In one preferred embodiment of the invention, the septic tank is basically configured in

the form of a long, narrow, pipe. The pipe may be of extruded plastic, having a diameter typically of fifty or sixty centimetres, and being four or more metres long. Such pipes are readily and inexpensively available. They are intended for commercially conveying water, including wastewater, and are intended to be buried in the ground. These relatively small diameter extruded plastic pipes are light in weight, whereby two persons can easily lift a length of the pipe down from a truck, manhandle it, and install it in an easily-prepared shallow trench, in the ground. The invention lies in configuring a structure such as a pipe of this kind, as a septic tank.

[0006] As mentioned, rectangular concrete septic tanks are traditional and well known, as are metal tanks. Both are readily available, with or without internal baffles. However, both these materials deteriorate in sewage, especially where sulphur is present. Also, septic tanks made of plastic are known. In particular, it is known to provide a septic tank in the form of a round plastic body, typically about one and a half metres in diameter, and two or three metres long. Theoretically, this body could be extruded, like a pipe, but a more favoured manner of construction is to fabricate the body over a mould, in, for example, glass-fibre-reinforced plastic. Similarly-fabricated plastic end-caps are cemented onto the ends of the round body, prior to installation in the ground. Hatches, ports, etc, have been included in the as-fabricated structures.

[0007] The known moulded-plastic septic tanks have been lighter in weight than the comparable concrete tank. However, when the tank is pumped out during service, or if the water table should rise, a tank made of plastic might be prone to flotation. Polyethylene and fibreglass tanks have improved chemical resistance. Fibreglass tanks are very expensive. Polyethylene tanks are not so durable, and can collapse if not installed and backfilled with unusual skill and care. Also, the known plastic tanks still take up more or less the same size of hole in the ground, so there is little saving of space, or of amount of excavation. Also, although the plastic tank is lighter, still a crane is needed to lift the plastic tank off the truck, move the tank to the prepared (excavated) hole, and lower the tank into the hole. As a result, the savings overall, arising from the use of a plastic tank, are marginal.

[0008] As mentioned, it is known to incorporate baffles into a concrete or metal tank. The baffles create mechanically-defined pathways along which the water passes. Without the baffles, a wide conduit would be available for the water flow. The tendency is, when the conduit is wide, not for the water to flow at an even rate over the whole cross-sectional area of the wide conduit, but for the water to start to establish unwanted pathways. It has been recognised that, in a case where the water can pass rapidly along a pathway that has

developed, from inlet to outlet, the volume of the tank is not being used efficiently. Some of the water, i.e the water in the pathway, now has a short residence time, the rest much longer.

[0009] Only when the residence time of all the water is the same is the volume of the septic tank being used at maximum efficiency. The baffles serve to define the pathways along which the water must pass, and serve to even out some of the differences in residence time.

Traditionally, baffles provide and define a long/narrow passageway for the water, where, without the baffles, the passageway would have been wide and short.

[0010] But baffles are awkward structures to incorporate into a septic tank. If the baffles really are effective to bring all points of the septic tank into equal effect, they will restrict access, and make servicing and cleaning out the tank almost impossible. Plus, the tank is still a tank, even if it contains baffles. And as such, it still requires the heavy lifting equipment, the disruptive excavations, etc, as described.

[0011] The invention provides another manner by which water can be made to move through a water treatment system, gradually and progressive, the whole body of water moving forwards, with each incoming dose at the inlet end, as an integrated unitary whole body, towards the outlet end.

[0012] Again, the aim is to make sure that every drop of water passing through the tank has the same residence time. (This aim can be expressed conversely, i.e as the aim to make sure that all of the available space is being utilised equally for the purpose of promoting the treatment reactions and processes).

GENERAL FEATURES OF THE INVENTION

[0013] The invention lies in conducting the wastewater through a treatment-trough, rather than through a septic tank. The preferred form of the treatment-trough is a treatment-pipe, and the invention is described herein mainly as it relates to the treatment-pipe.

[0014] The treatment-trough, or treatment-pipe, has a long/narrow configuration. The narrowness of the cross-section means that substantially all of the cross-section is utilised, more or less equally, for treatment. In a traditional septic tank, as mentioned. it does not take long for pathways to start to develop in the tank. Then, the incoming doses of sewage water start to take a short-cut to the outlet, and, at worst, the rest of the volume of the tank is simply

wasted.

[0015] Ideally, the treatment-pipe and the apparatus should be so configured that, when a dose of sewage enters the inlet, the whole volume of water contained in the apparatus moves forwards towards the outlet, over its whole cross-sectional area, as a unitary body. Ideally, every drop of water that emerges from the outlet has been inside the pipe for the same residence time as every other drop. When that is so, the treatment-pipe is at its maximum volumetric efficiency, being the efficiency in terms of minimising the water volume that is needed, in the pipe, to achieve full treatment. Of course, the ideal cannot be achieved, wherein all drops of water would have exactly the same residence time; however, the long/narrow treatment-pipe performs much closer to the ideal than a traditionally-shaped septic tank.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0016] By way of further explanation of the invention, exemplary embodiments of the invention will now be described with reference to the accompanying drawings, in which:

Fig 1 is side elevation of a treatment apparatus, installed in the ground, which embodies the invention;

Fig 2 is a cross-section of a treatment-pipe;

Fig 3 is a plan view of another treatment apparatus;

Fig 4 is a side elevation of a further treatment apparatus;

Fig 5 is a plan view of another treatment apparatus.

[0017] The apparatuses shown in the accompanying drawings and described below are examples which embody the invention. It should be noted that the scope of the invention is defined by the accompanying claims, and not necessarily by specific features of exemplary embodiments.

[0018] The wastewater treatment apparatus 20 shown in Fig 1 includes an inlet port 23, which receives sewage wastewater from a dwelling, for example a single-family house. The apparatus, to meet the usual codes for e.g a three-bedroom dwelling, should be able to cope with sewage being dosed into the apparatus at the daily rate of 1600 litres per day, being applied at the dose-rate of ten to fifty doses per day, and the following dimensions of the apparatus are set by the need to meet these requirements.

[0019] The apparatus 20 includes an inlet chamber 24, which comprises a 1.5 m length of plastic pipe, of diameter 60 cm. The apparatus also includes an outlet chamber 25, which comprises a 1.0 m length of the 60 cm pipe. The chambers are manufactured with holes, having welded or cemented-on flanges and bosses 26, to enable inlet and outlet pipes 27,28 to be sealingly attached thereto, and to enable a treatment-pipe 29 to be connected between the chambers.

[0020] The treatment-pipe 29 is of inexpensive, readily-available, extruded plastic (polyethylene) pipe, having a diameter of 45 cm. The treatment-pipe 29 is 16 m long. (Alternatively, the treatment pipe may be, for example, 60 cm diameter and nine metres long.) An insulative and protective covering of soil, 30 cm deep, lies over the buried treatment-pipe.

[0021] The apparatus is installed in a prepared (i.e excavated) receptacle in the ground. At the two ends, the excavation accommodates the inlet and outlet chambers 24,25. Between the ends, a shallow trench, barely 1 m deep, and $\frac{1}{2}$ m wide, is all that is needed to accommodate the treatment-pipe. Of course, heavy excavation equipment may be put to use, if available. But septic treatment apparatus is required in respect of all dwellings, including those where access for heavy equipment is not so easy, and/or the ground is difficult to dig, whereby the minimal excavation requirement is especially beneficial. It is an aim of the invention to treat the water in a pipe or trough or culvert, the mechanical characteristics of which permit the designer to assure mechanical stability when installed to only a shallow depth.

[0022] For the purposes of periodic cleaning and other service, the (horizontal) treatment-pipe 29 itself might be difficult to reach. However, usually, most of the heavy solids (sludge 46) will collect in the deposition-sump 48 of the inlet chamber 24. The lighter solids (scum 47) will float on the surface of the water in the inlet-chamber. Access to the inlet-chamber may be had very easily, by means of a removable hatch 30. In fact, a basket may be placed in the inlet-chamber, and the basket simply lifted out, through the hatch 30 - sludge, scum, and all - for servicing. Solids can be expected to collect also in the outlet chamber 25, but in smaller quantities.

[0023] It is unlikely that there will be much build-up of sludge in the treatment-pipe 29 itself, since the movement of the water along the pipe (slow though that movement is) will tend to carry solids along to the outlet. The pipe 29 may be set at an angle to the horizontal, if desired, to help prevent build-up actually in the pipe.

[0024] Preferably, the treatment-pipe itself is completely filled with water, i.e there is no air, and no access for air, in the treatment-pipe 29. The pipe 29 is the place where the main organic digestion reactions take place, which reduce the BOD of the water being treated, and these microbial reactions take place under anaerobic conditions.

[0025] Generally, the inlet and outlet chambers should be vented, to make sure there is no build-up of pressure (or vacuum) inside. The venting may be done via the inlet pipe 27, to a venting stack on the roof of the dwelling, to control odours etc. If the layout of the pipe permits a small airspace on top of the water in the pipe, that is not too important (as there is an airspace above the water in a traditional septic tank, but still the water in the treatment pipe must not be allowed to become aerated, again as in a traditional system. Water undergoing septic breakdown reactions in the treatment pipe should remain substantially still, except for the occasional shifts due to fresh doses of wastewater being added at the inlet.

[0026] Major benefits of the invention include the fact that the long/narrow pipe-configuration is excellent at preventing pathways from arising. As a result, all portions of the volume of the treatment-pipe contribute equally to overall treatment performance. Also, the excavated hole in the ground, as needed to accommodate the treatment-pipe, can be done with considerably less expense and disruption than the corresponding excavation needed to accommodate a traditional septic tank.

[0027] For the purposes of the invention, the difference between a long/narrow treatment-pipe, as used in the invention, and the long/narrow conduit that arises from the placement of baffles in a conventional septic tank, is that a baffle is a wall that is wetted on both sides by the wastewater undergoing septic treatment. In the treatment-pipe, the walls of the treatment-pipe are wetted by the wastewater only on the inside. The outside surface of the treatment-pipe wall is in contact with air, or with the ground in which the pipe is buried. (The ground might be saturated with water, but that is other water, i.e not the wastewater undergoing treatment.)

[0028] As may be understood from Fig 1, when water enters the inlet port 23, the volume of water in the apparatus increases, and the level of the water tends to rise, thereby causing excess water to flow out from the outlet port 32. Water drains out of the outlet port, until only a minimum-standing-body of water remains in the apparatus. The level of the minimum-standing-body, and thus the volume of the minimum-standing-body, is defined by the height of the weir 34 at the outlet port 32. The water remains at this level until the next dose of wastewater enters at the inlet port.

[0029] Figs 1 and 2 illustrate how the dimensions that are important in the definition of the invention (and especially in defining the long/narrow aspect of the invention) are determined. At the inlet end, an inlet-point 35 is established, as the point on the surface of the minimum-standing-body of water which is the closest point to the inlet port. Correspondingly, an outlet-point 36 is the point on the surface of the minimum-standing-body of water which is the closest point to the outlet port. A line is drawn, through the wastewater undergoing treatment, along the shortest route between these two points 35,36. This line is termed the standing-body-length 37.

[0030] At each point along the length of the standing-body-length 37, the water has a standing-body-width 38. The standing-body-width is the maximum overall width of the wastewater at that point. Usually, this width will be equal to the maximum horizontal distance apart of the inside-surfaces of the walls of the pipe, at that point.

[0031] Fig 2 is a cross section of the treatment-pipe 29 taken at a particular point along the standing-body-length 37. The standing-body-width is the maximum internal (horizontal) width of the pipe. The depth at which the standing-body-width occurs is the depth at which the standing-body-width is maximum.

[0032] The standing-body-width 38 would not be the width of the surface of the water unless the width of the surface happens to coincide with the maximum distance apart of the pipe walls. Besides, the water need not have a surface at all, over much of the standing-body-length (although the water must have a surface at the inlet and outlet ends).

[0033] The depth 39 of the water is a vertical measurement. The depth is affected by whether there is an airspace 40 above the water.

[0034] Point P1 is a point on the inwards-facing-surface 42 of the pipe wall 43, and is a point on that surface that is wetted by the minimum-standing-body of wastewater that is undergoing treatment in the treatment-pipe. Point Q1 is a point on the outwards-facing-surface 45 of the pipe wall, being the closest point on the outwards-facing-surface from point P1, and is separated therefrom by the thickness T1 of the pipe wall at that point. Point Q1 is not wetted by the minimum-standing-body of wastewater undergoing treatment in the treatment-pipe.

[0035] This condition (of not being wetted on the outwards-facing-surface) is not true of a baffle. A baffle is, by definition, wet on both sides. In the invention, no portion of the treatment-pipe wall 43 is wetted on both sides by the water undergoing treatment. No portion

of the wall of the treatment-pipe doubles as another portion of the wall of the treatment-pipe. The treatment-pipe is of long/narrow configuration, to ensure efficiency of usage, and the long/narrow configuration is achieved, not by putting baffles in a short wide tank, but by providing a structure that is itself physically long and narrow, i.e the treatment-pipe.

[0036] The long/narrow configuration is defined by the following dimensional parameters of the treatment-pipe:

- (a) the standing-body-length 37 is at least four metres;
- (b) the volume of the minimum-standing-body is at least 1.5 cubic metres;
- (c) referring to at least fifty percent of the points along the standing-body-length, both the standing-body-width 38 at that point, and the depth of the water at that point, are less than one quarter of the standing-body-length 37.

These dimensional limitations will now be explained.

[0037] Traditionally, the smallest size of septic tanks have had a capacity of around 2.5 cubic metres, which is the size appropriate to (and fulfilling the codes for) a small single-family dwelling. Because the treatment-pipe utilises its volume and capacity so very efficiently, an equivalent degree of treatment can be realised, with a treatment-pipe, of about 1.5 cubic metres.

[0038] The "long" aspect of the long/narrow configuration of the treatment-pipe is determined by the limitation that the standing-body-length 37 must be at least four metres.

[0039] The "narrow" aspect of the long/narrow configuration is determined by the limitation that the treatment-pipe have a width 38 of, preferably, less than sixty centimetres. The narrowness requirement applies to the treatment pipe portion of the apparatus, not to the end-chambers, which may be wider. But the end-chambers should not account for more than fifty percent of the standing-body-length. At this, it is easy to ensure that no pathways develop in the pipe. The wider the pipe, the more possible it is for unwanted pathways to develop, and for the structure thereby to become inefficient. If the treatment-pipe were to have a width of more than about one quarter of the standing-body-length, the development of unwanted pathways, over a period of time, would be more or less inevitable.

[0040] The treatment-pipe should not be so narrow that the water shoots along it at a high velocity, of course, given that an adequate residence time to complete the biological reactions is being sought. A practical lower limit to the narrowness of the standing-body-width 38 would be around twenty-five centimetres; below that, the water would inevitably be moving too

quickly.

[0041] It is not essential that the whole minimum-standing-body of water be contained actually in the treatment-pipe. As shown in Fig 1, some of the water is contained in the inlet and outlet chambers 24,25.

[0042] The structure of Fig 1, i.e the treatment-pipe 29 and the two chambers 24,25, may be pre-fabricated and pre-assembled, as an integrated whole unit, prior to being taken to the site. Alternatively, the final insertion of the pipe 29 into the (factory-formed) flanges 26 in the chambers may be left, to be completed upon installation at the site. In that case, the ease with which the unassembled components can be handled and transported must be set against the difficulty of ensuring, on site, that the seal between the pipe and the chambers is done properly.

[0043] Alternatively, the inlet and outlet pipes 27,28 may be coupled directly into the ends of the treatment-pipe, i.e the inlet and outlet chambers 24,25 may be omitted, as separate structures. However, it is more convenient for the manufacturer to make the inlet and outlet chambers as standard components, and then the treatment-pipe 29 is simply a length of standard cylindrical pipe, having no attachment structures fabricated into it. Then, the length of the pipe is the only variable, installation to installation. The presence of the chambers 24,25, with their openable hatches 30, means that the settled-out sludge and scum can be easily accessed, and removed. Easy access is especially important for the inlet chamber 24, since the sludge tends to settle out mainly near the inlet end.

[0044] However, the end-chambers should be regarded as being adjuncts to the treatment-pipe. A substantial proportion of the volume of the minimum-standing-body of water undergoing treatment must be contained in the long/narrow structure of the apparatus, i.e in the treatment-pipe. That is to say, at least one half of the volume of the minimum-standing-body of water should be contained within the treatment-pipe itself. If the inlet and outlet chambers were to contain more than one-half of the total volume of the minimum-standing-body, that would mean the chambers were too large, which would be an inefficient utilisation of the available space, and which would lead to the development of unwanted pathways.

[0045] Expressed as a linear dimension of the standing-water-length 37, at least fifty percent of the standing-water-length should lie within the treatment-pipe 29 itself. Preferably, the treatment-pipe accounts for three-quarters of the standing-water-length.

[0046] It is repeated that the treatment-pipe, by definition, is the long/narrow portion of the apparatus, over which the standing-body-width is less than one quarter of the standing-body-length. Up to half of the total volume of the minimum-standing-body of water may be contained elsewhere than in the treatment-pipe, where the long/narrow limitation does not apply.

[0047] The inlet chamber preferably is deeper than the outlet chamber (and than the middle chamber), because it is the inlet chamber that collects most of the settled-out solid sludge. However, if the lie of the land is especially difficult, it may be easier to excavate a deeper hole for the outlet-chamber or for the middle-chamber than for the inlet-chamber. In that case, the outlet or middle chamber may be lengthened (i.e deepened) appropriately, and the main collection of sludge would then occur in that chamber. One of the benefits of the treatment-pipe apparatus is that, if the inlet chamber is shallow, whereby its floor is quickly covered with sludge, it is unlikely that sludge will then build up actually in the treatment-pipe, due to the (occasional) movement of water in the treatment-pipe. Of course, when the inlet chamber is shallow, the prudent owner will monitor the apparatus more closely, to make sure the treatment-pipe is not starting to become blocked with sludge.

[0048] The designer should prefer the inlet and outlet chambers to be small, to minimise the amount of extra excavation (i.e extra to the trench that will house the treatment-pipe). The main benefit of the invention comes from the presence of the treatment-pipe, rather than from the presence of the inlet and outlet chambers. One, or both, chambers, as separately-manufactured structures, may be omitted. Again, the water contained in the chambers should not comprise more than half the total volume of the whole minimum-standing-body.

[0049] The treatment-pipe 29 preferably is a length of extruded round plastic pipe. However, other forms are contemplated, and, as mentioned, in the broad sense the treatment structure should be referred to rather as a treatment-trough, than a treatment-pipe. The treatment-trough must be watertight, as to its bottom and sides, but there is no need for the treatment-trough to be watertight as to its roof. The trough roof is there mainly for physical protection -- to prevent objects falling into the water. The treatment-trough may be structured as a fabrication, in which the roof is separate from the floor and sides of the trough.

[0050] On the other hand, the convenience is preferred, of containing the water in an actual physical pipe, with its constant-thickness cylindrical walls, and inexpensive, easily available, but assured, integrity.

[0051] When the treatment-pipe is long, it may be in sections. The sections may be joined by such means as bolted-together flanges, or an enlarged end on one of the sections which slides over the plain end of the adjacent section, etc.

[0052] The treatment apparatus may be arranged with more than one treatment-pipe. When two or more treatment-pipes are used, they may be arranged in series. An example of an apparatus with two pipes in series, where the two pipes lie both at the same level, is shown in Fig 3.

[0053] Putting two pipes in series can be done where, for example, the lie of the land dictates a major change of direction. In Fig 3, a middle chamber 49 is provided, between the first and second pipes. While this middle chamber can be of some use for collecting settled-out solids, its main purpose is simply to provide a physical structure into which the ends of the treatment-pipes can be mounted and sealed.

[0054] An example of an apparatus with two pipes in series, where the two pipes lie at different levels, is shown in Fig 4. The water level in the second pipe is lower than that in the first pipe, due to the presence of the weir 50 in the middle chamber 52. Thus, the minimum-standing-body of water need not be in one coherently-unitary body, having all the same surface level. However, a change in level might give rise to some aeration of the water, which might affect the efficiency of the anaerobic reactions, so preferably the minimum-standing-body should be a coherent, unitary body of water, unless that is impossible due to the lie of the land.

[0055] An example of an apparatus with two treatment-pipes in parallel is shown in Fig 5. This can be done, again, when the ground is very difficult, and deep excavation must be kept to a minimum. Both pipes use a common inlet chamber 53 and a common outlet chamber 54. Where two (or more) pipes are used, the designer preferably should arrange the inlet and outlet chambers such that neither one of the pipes receives more flow than the others. Thus, it would not be preferred, in the invention, to provide two or more treatment-pipes, where the pipes were substantially different as to size, flow-rate, etc. The designer preferably should see to it that the residence time of the water is the same, whichever treatment-pipe the water passes through.

[0056] In the parallel treatment-pipes version, there is only one minimum-standing-body of water, which occupies both (or all) the parallel pipes. There are as many standing-body-lengths as pipes. The invention requires that the dimensional limitations as defined herein be

true in respect of each pipe.

[0057] It should be noted that the treatment apparatus as described herein is intended only for promoting the anaerobic digestion reactions. After having passed through the anaerobic treatment stage, in the treatment-pipe, the water has to be aerated, to promote the needed aerobic treatment reactions. The aerobic treatment station is not included in the invention, and the treatment-pipe, as described herein cannot, by definition, be a part of the aerobic treatment station.

[0058] In a case where the treatment apparatus has to accommodate a greater dose rate of incoming sewage, the treatment-pipe length may be increased. But there is no need to increase the other dimensions of the apparatus. Thus, capacity may be increased, up to a dose-rate of around 15,000 litres per day, simply by increasing the length of the 45 cm diameter pipe, for instance to twenty metres. In respect of the minimum-standing-body of water, the designer should aim for four-to-one, or greater, in respect of the ratio of the standing-body-length to the standing-body-width, at more than half the points along the standing-body-length.

[0059] Below four-to-one, the container is not a long/narrow pipe; rather, it would now be characterised as a short/wide container, like a traditional septic tank; and as such it would be prone to the channelling of unwanted pathways, and not be so secure mechanically. Although four-to-one is the limit, about six-to-one should be regarded as the practical ratio to aim for. An upper limit might be set at about a ten-to-one ratio. If more than that, the danger would be that the water might be travelling along the treatment-pipe at too high a velocity; but higher ratios could be used where that danger can be accommodated.

[0060] As described, the invention is particularly applicable for use in domestic installations, either for one house, or for a small number of houses that share wastewater treatment, or for small institutional installations, having a dose rate up to about 15,000 litres per day. In these installations, the septic treatment is followed by the usual aerobic treatment, and then the water is infiltrated into the ground, at or close to the treatment station(s). The water is not piped away (or not piped for any great distance), either before or after passing through the anaerobic and aerobic treatment station(s). In these cases, apart from the plumbing pipes in the house, the treatment-pipe itself comprises almost the only length of pipe in the system. However, it is not a limitation of the invention that the water not be piped away.

[0061] For a one-bedroom house (750 litres per day), a five or six metre run of 45-cm pipe

(with suitable end-chambers) would be suitable; so would two five or six metre runs of 30-cm pipe. For a four-bedroom house (2,500 litres per day) nine or ten metres of 60-cm pipe, plus end-chambers, would be suitable.

[0062] The invention is not so applicable to large installations, e.g installations that cater for dozens of domestic homes, or for larger public institutions, or municipal water treatment installations, because there, usually, the savings arising from the minimal excavations, and from the easy assurance of mechanical stability, would be less. This is not to say that the invention must be ruled out in respect of large installations, and indeed especially the parallel-pipe configuration of Fig 5 can lend itself well to large installations. But rather, the invention especially lends itself to the type of housing development where each house has its own individual water treatment station, or each set of four or five houses.

[0063] Notionally, the dimensions of the apparatus could be reduced, if the dosing were less than 1000 litres per day; but in practice, treatment systems are hardly ever designed for dosing rates of less than 1000 litres per day.

[0064] If the desired average residence time for water passing through the system were one day, the minimum standing volume should be equal to one day's dosage. But the average residence time should not be set as low as one day, since that would leave too small a margin for variations. Rather, the designer should provide that the minimum-standing-body of water has a volume of preferably one-and-a-half times, and a minimum of one-and-a-quarter times, the average daily dose rate. Thus, where the dose rate is 3,000 litres per day, the volume of the minimum-standing-body preferably should be 4,500 litres. As mentioned, keeping the width and depth of the minimum-standing-body below one quarter of the standing-body-length, over at least half of the standing-body-length, ensures freedom from unwanted pathways, where the treatment-pipe is less than one metre diameter, is suitable for installations dealing with up to about 15,000 litres per day, in that differences in residence time can be accommodated by using different lengths of treatment pipe.

[0065] However, for installations that deal with more than about 15,000 litres per day, the diameter of the treatment pipe should be increased beyond the one metre, because at that large flow rate, a one-metre pipe would be too narrow, in that the water would be flowing along the pipe at too high a velocity. Therefore, for large flow rates, the diameter of the pipe should be increased to a dimension that enables the water, again, to move only very slowly.

[0066] As mentioned, the apparatus should be engineered such that the volume of the

minimum-standing body is $1\frac{1}{4}$ to $1\frac{1}{2}$ times the average daily dosing rate. If the designer specifies a smaller volume than that, there may not be enough margin to cater for the inevitable variations in usage. If the designer specifies a greater volume, the system may be utilising the available space in an inefficient manner. It may be noted that the cost of returning later to increase the capacity of a too-small treatment-pipe system is considerably less than the cost of returning later to increase the capacity of a too-small concrete tank system. So, with a concrete tank, the prudent designer makes sure to over-engineer the system; but with the treatment-pipe, the designer can leave less of a margin.

[0067] It should be understood that the treatment-pipe of the invention is a deliberately engineered containment structure. It might be considered that, sometimes, a treatment-pipe system, like that described herein, might have arisen accidentally, for example when a sewage pipe became (partially) blocked, causing water to be backed up, and the backed-up pool of water might correspond to the minimum-standing-body of water. Indeed, the water in such a pool might undergo some anaerobic treatment. The treatment-pipe (or treatment-trough) of the invention lies in the engineered structure that sets the minimum-standing-body of water, as described; the invention does not lie in the body of water itself.

[0068] Where the wastewater is fairly clear of suspended solids, for instance where the treatment-pipe station receives water that has passed through a pre-treatment station, the treatment-pipe can contain a filter medium. The purpose of the filter medium is to encourage attached microbial growth and to enhance treatment. The medium should have good permeability and porosity, while maximizing surface area. A mat of thin plastic strips, for example, is very suitable. Preferably, the medium should be removable from one end of the treatment-pipe, for occasional servicing. The medium must be made from a non-biodegradable material that will attract microbes, such as polyethylene, polyurethane, rock wool; but not material that will absorb water and weaken, like nylon; nor repel microbes, like styrene-type.

Claims

CLAIM 1. A container for treating wastewater, installed in association with a source of wastewater, wherein:

the container includes an inlet port through which wastewater received from the source enters the container, and includes an outlet port through which treated water exits from the container;

the arrangement of the container is such that, when water enters the inlet port, the volume of water in the container tends to increase, and the level of the water in the container tends to rise, thereby causing excess water to flow out from the outlet port;

the outlet port is so arranged that water drains out of the container down to a minimum-standing-body of water in the container, whereby water in the container in excess of the volume of the minimum-standing-body drains out from the outlet port;

the container includes a treatment-trough;

the treatment-trough has a trough-wall, comprising a sheet of impermeable material;

the sheet of material comprising the trough-wall has an inwards-facing surface and an outwards-facing-surface;

the inwards-facing- and outwards-facing surfaces are opposed surfaces of the sheet of material, and the sheet of material is solid as to its thickness between the two surfaces;

all the points on the inwards-facing surface that are wetted by the minimum-standing-body are designated respectively points P1,P2,...,PN;

in respect of all the points P1,P2,...,PN on the inwards-facing surface, the sheet of material has a respective thickness T1,T2,...,TN mm;

all the points P1,P2,...,PN on the inwards-facing surface correspond to respective points Q1,Q2,...,QN which lie on the outwards-facing surface of the trough-wall, the points P1,P2,...,PN being spaced respectively T1,T2,...,TN mm from the points Q1,Q2,...,QN;

the treatment-trough is structurally isolated, in the sense that no portion of the trough-wall is wetted on both sides by the minimum-standing-body of water;

all points Q1,Q2,...,QN on the outwards-facing surface of the trough-wall lie wholly outside the treatment-trough, in the sense that all the said points Q1,Q2,...,QN are not wetted by the minimum-standing-body of water in the treatment-trough;

the minimum-standing-body of water has a standing-inlet-point and a standing-outlet-point, which are the closest points on the surface of the minimum-standing-body to the inlet port and the outlet port respectively;

the minimum-standing-body has a standing-body-length, which is the length of the shortest line through the minimum-standing-body, between the standing-inlet-point and the standing-outlet-point;

the minimum-standing-body has a standing-body-width, taken at a point along the standing-

body-length, and the standing-body-width is the overall width of the minimum-standing-body at that point, measured in a horizontal plane at right angles to the line of the standing-body-length at that point;

the treatment-trough is of a long/narrow configuration, in that;

- (a) the standing-body-length is at least four metres;
- (b) the volume of the minimum-standing-body of water in the treatment-trough is at least 1½ cubic metres;
- (c) referring to at least fifty percent of the points along the standing-body-length, both the standing-body-width at that point, and the depth of the water at that point, are less than one quarter of the standing-body-length.

Claim 2. Container of claim 1, wherein the treatment-trough comprises a treatment-pipe, being a length of pipe having a wall of constant cross-section along its length.

Claim 3. Container of claim 2, wherein the treatment-pipe is right-cylindrical.

Claim 4. Container of claim 1, wherein:

the container includes an inlet chamber, which contains the inlet-port;

the treatment-pipe is sealingly attached to the inlet-chamber, and is in liquid-transfer-communication therewith.

Claim 5. Container of claim 4, wherein the inlet-chamber includes a deposition-sump, which is so arranged, as to its depth and location in the inlet-chamber, that a portion of the water comprising the minimum-standing-body remains still enough to enable sediment present in the water to settle out.

Claim 6. Container of claim 1, wherein:

the container includes an outlet chamber, and the inlet chamber contains the outlet-port;

the treatment-pipe is sealingly attached to the outlet-chamber, and is in liquid-transfer-communication therewith.

Claim 7. Container of claim 1, wherein the arrangement of the container is such that wastewater entering the minimum-standing-body undergoes anaerobic treatment reactions, and remains in the container long enough that water exiting from the outlet port has undergone substantially complete septic treatment.

Claim 8. Container of claim 7, wherein the arrangement of the container is such that the

wastewater remains in the container for at least one day.

Claim 9. Container of claim 1, wherein the wastewater comprises raw sewage from a dwelling.

Claim 10. Container of claim 1, wherein the line comprising the standing-surface-length is continuous and uninterrupted, between the standing-inlet-point and the standing-outlet-point.

Claim 11. Container of claim 1, wherein the container includes two or more treatment-troughs, arranged in series, so that the wastewater comprising the minimum-standing-body passes from one to another.

Claim 12. Container of claim 12, wherein the treatment-troughs comprise two treatment-pipes, and the container includes a middle chamber, sealingy connected between the two treatment-pipes.

Claim 13. Container of claim 1, wherein:
the container includes two treatment-troughs, arranged in parallel, containing respective portions of the minimum-standing-body of wastewater;
the arrangement of the container is such that the residence time of the respective portions of the water in the two treatment-troughs is substantially the same.

Claim 14. Container of claim 1, wherein the structure of the container is such that the wastewater, in passing from the inlet point to the outlet point, has substantially no opportunity to become aerated.

Claim 15. Container of claim 1, wherein, referring to at least fifty percent of the points along the standing-body-length, both the standing-body-width at that point, and the depth of the water at that point, are less than one sixth of the standing-body-length.

Claim 16. Container of claim 1, wherein, referring to at least fifty percent of the points along the standing-body-length, both the standing-body-width at that point, and the depth of the water at that point, are less than one tenth of the standing-body-length.



Claim 17. Container of claim 1, wherein the treatment-pipe includes a body of a filter medium, which is so structured as to promote the attachment of microbes thereto.

Abstract of the Disclosure

Title: WASTEWATER TREATMENT SYSTEM

In place of the conventional septic tank, wastewater undergoes anaerobic treatment and settlement in a treatment-pipe. The treatment-pipe has a long/narrow configuration. End chambers provide inlet and outlet ports, a sump for collecting settled-out solids, and sealing attachments for the treatment-pipe itself. Two or more treatment-pipes may be connected in series or parallel.

Anthony Asquith
Agent for the Applicant
Docket: 268-56

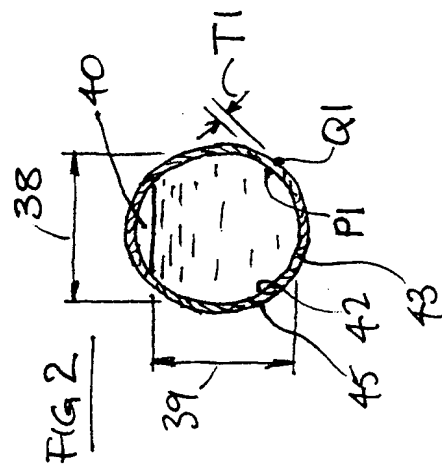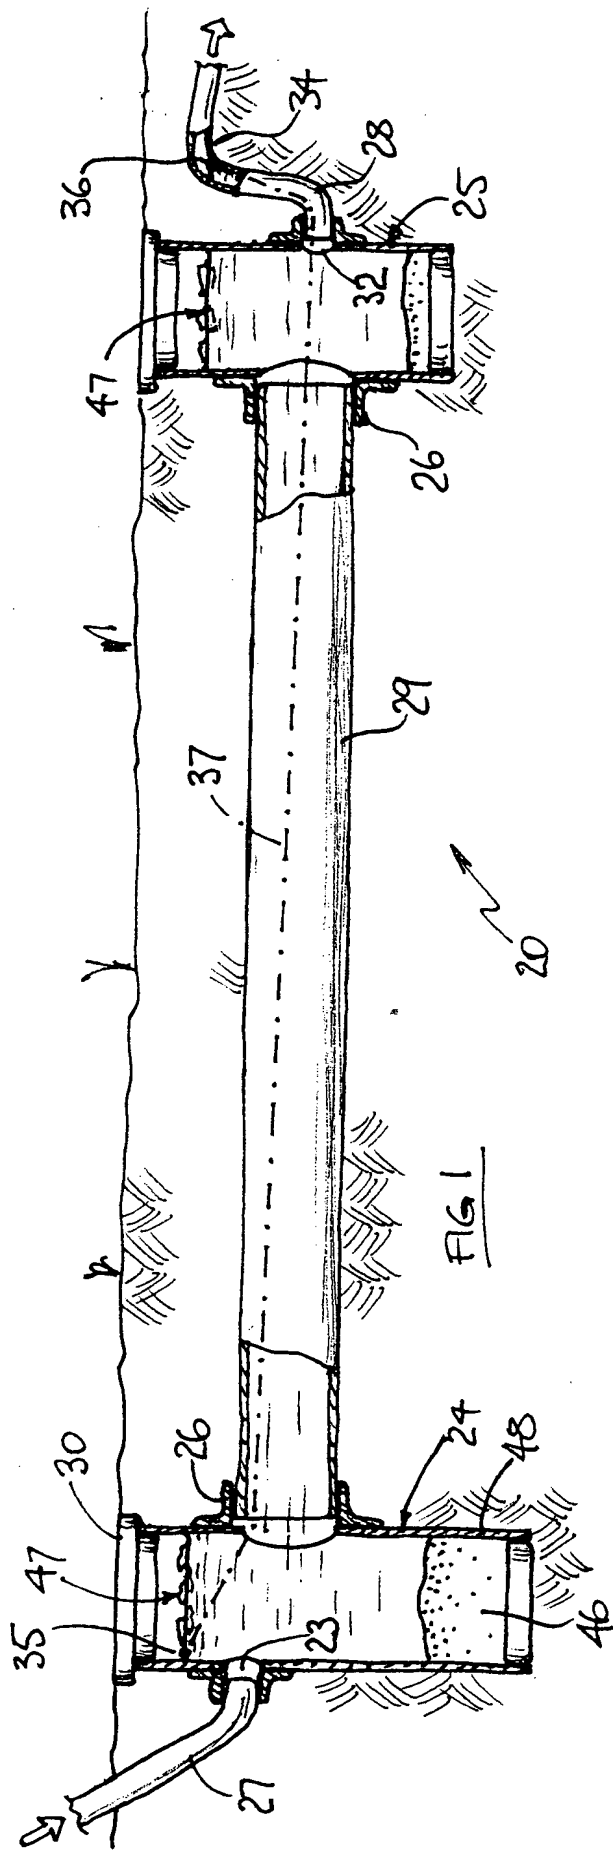





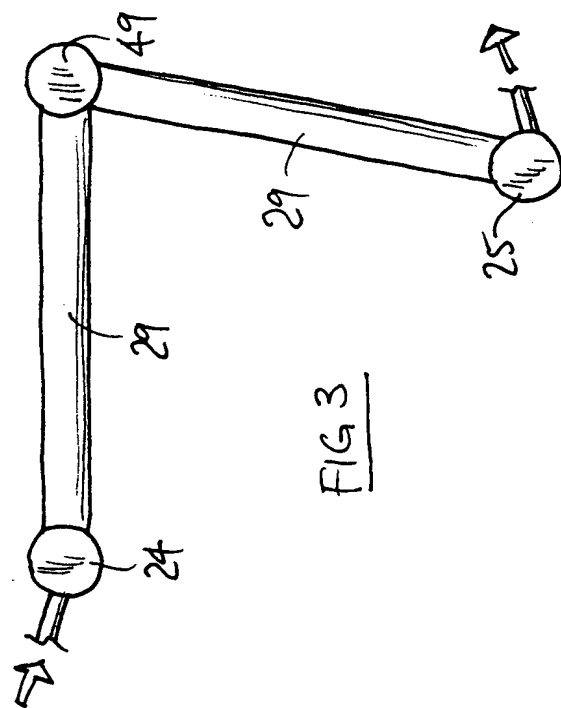


FIG 3



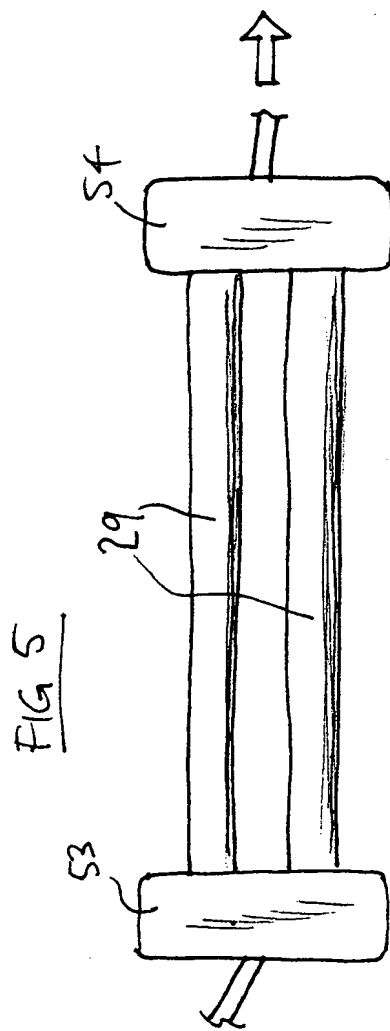

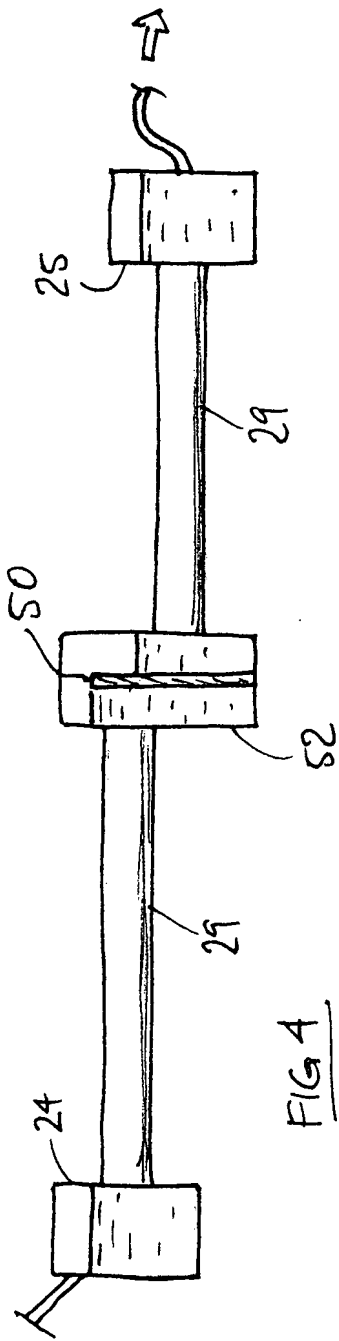

1 2 3 4

